

Tel.:
Faks.:

TM 32/7
Tipas: Panardinamas siurblys





Klijentas
Klijento Nr.
Kontaktui
Darbuotojas

Projektas
Projekto Nr.
Poz. Nr.
Objektas
Data

2012-05-21

Puslapis 1 / 1

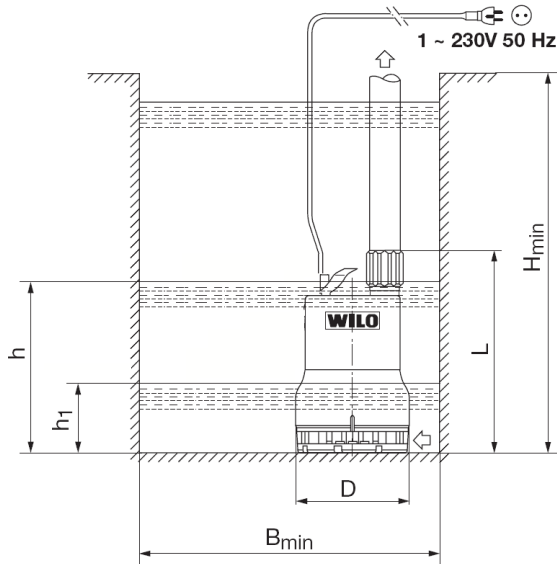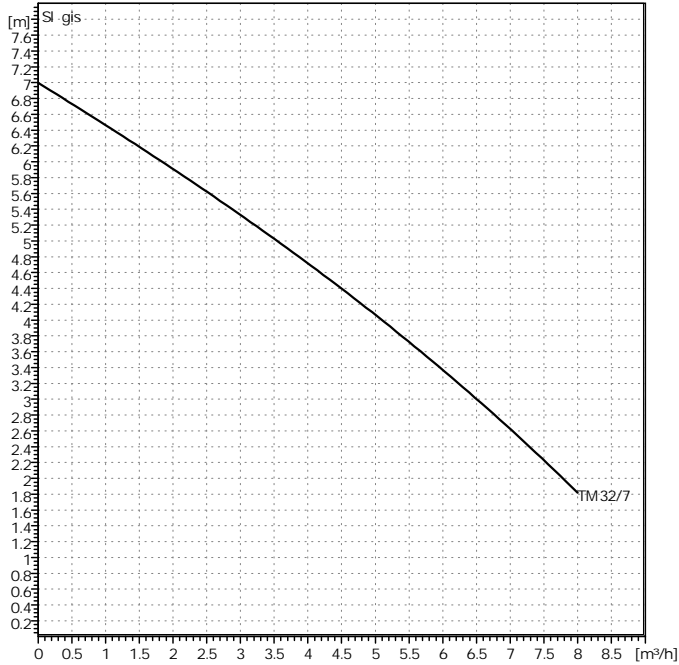

Pradiniai duomenys

Debitas	0	m ³ /h
Sl?gis	0	m
Skystis	Vanduo, grynas	
Skys?io temperat?ra	20	°C
Tankis	0.9983	kg/dm ³
Kinematinis klampis	1.005	mm ² /s
Parcial. garø sl?gis	0.02337	bar

Siurblio duomenys

Gamintojas	WILO	
Tipas	TM 32/7	
Siurblio tipas	Viengubas	
Sl gio reikšm	PN 6	
Min skys io temperat ra	0	°C
Maks. skys io temp.	35	°C

Hidrauliniai duomenys (darbo taško)

Debitas		m ³ /h
Sl?gis		m
Apsukos	2900	1/min
Darbra io dydis	0	mm

Medžiaga / Veleno sandariklis

Siurblio korpusas	Polipropilenas
siurbimo pagrindas	Polipenileno oksidas
Darbo ratas	Polipropilenas
Variklio korpusas	1.4301
Velenas	AISI 420 ner dij. pl.
Kabelis	H 07RN-F

Matmenys

mm

L	294	h2	14				
D	165						
H min	280						
B min	350						
h	237						
h1	102						

?siurbimo pus?	-	/ PN 0
l?pylimo (sl?gimin?) pus?	35	/ PN 0
Svoris	3.8	kg
Laisvas pra jimas	10	mm

Variklio duomenys

Nominali galia P2	0.25	kW
Nominalios apskukos	2900	1/min
Nominali tampa	1~230 V, 50 Hz	
Maksimali srov	1.4	A
Apsaugos laipsnis	IP 68	
Leistinas tampos svyravimas +/-	10%	

Art. Nr (Standartinis ispildymas) 4048412